

EKSPLUATĀCIJAS ĪPAŠĪBU DEKLARĀCIJA No. CPR-IT1/0441

- 1) Unikāls izstrādājuma tipa identifikācijas numurs: **MAPEFLEX AC-P**
- 2) Paredzētais pielietojums: **Akrila hermētiķis nestrukturālajiem darbiem iekštelpās un ārpus tām, fasāžu elementiem**
- 3) Ražotājs: **MAPEI S.p.A. – Via Cafiero, 22 – 20158 Milan – Italy - www.mapei.it**
- 4) Sistēma AVCP: **Sistēma 3**
- 5) Vienotais standarts: **EN 15651-1:2012**

Izpildinstitūcijas: **Laboratorija Tecnia Research & Innovation, N. 1292, veikusi novērtējumu, pamatojoties uz testa paraugiem, ko iesniedzis ražotājs.**

Laboratorija CSI S.p.A., N. 0497, veikusi novērtējumu (ugunsdrošības noteikšana), pamatojoties uz testa paraugiem, ko iesniedzis ražotājs.

- 6) Deklarētās veikspējas īpašības:

EN 15651-1 F-EXT-INT (Klase 12,5P)

Pakļaušana noteiktiem klimatiskajiem apstākļiem: Metode A

Pamatne: Java M2 bez gruntēšanas

Būtiskākie raksturlielumi	Ekspluatācijas īpašības
Ugunsdrošība Bīstamu vielu izdalīšanās Ūdens un gaisa necaurlaidība: – Plūsmas noturība – Apjoma zudums – Pagarinājums pēc iemērkšanas ūdenī, pie 23 °C Noturība	Klase E Skat DDL ≤ 3 mm ≤ 25 % ≥ 100 % Tests iziets

Augstāk norādītā produkta veikspēja atbilst deklarētajām īpašībām.

Šī ekspluatācijas īpašību deklarācija ir izsniegta saskaņā ar Regulu (ES) Nr 305/2011, ar pilnu iepriekš norādītā ražotāja atbildību

Parakstīts ražotāja vārdā: **Paolo Murelli – Korporatīvā Kvalitātes Vadība**

Milāna, 09/02/2016

.....

EĪD PDF formātā ir pieejamas Mapei mājas lapā


Pārskats 1

Nemainīgs produkts, atjaunota EID forma

CE MARKĒJUMS

 1292, 0497	 Via Cafiero, 22 – 20158 Milano (Italy) www.mapei.it
14. CPR-IT1/0441 EN 15651-1 F-EXT-INT MAPEFLEX AC-P <i>Acrylic sealant for non-structural internal and external use in façade elements</i>	
Conditioning: Method A Substrate: Mortar M2 without primer	
Reaction to fire Release of dangerous substances Water tightness and air tightness: – Resistance to flow – Loss of volume – Elongation after immersion in water at 23 °C Durability	Class E See SDS ≤ 3 mm ≤ 25 % ≥ 100 % Pass

CE reminder printed on the cartridge

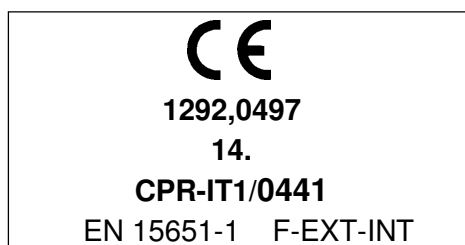

Piezīme:

MAPEI nodrošina šo pielikumu kopā ar EĪD, lai atvieglotu CE marķējuma skaidrojumu starptautiskajiem klientiem. Pievienotais CE marķējums var būt nedaudz atšķirīgs, salīdzinot ar to, kas norādīts uz attiecīgā iepakojuma vai dokumentācijas, jo:

- Dēļ grafiskā pielāgojuma uz iepakojuma vai izmantotās drukāšanas metodes,
- Dēļ valodu atšķirības (viens iepakojums vairākām valstīm),
- produkts ir jau krājumā uz brīdi, kad tiek ieviests CE marķējuma atjauninājums,
- Drukas kļūdas dēļ.

DECLARATION OF PERFORMANCE N. CPR-IT1/0441

- 1) Unique identification code of the product-type: **MAPEFLEX AC-P**
- 2) Intended uses: **Acrylic sealant for non-structural internal and external use in façade elements**
- 3) Manufacturer: **MAPEI S.p.A. – Via Cafiero, 22 – 20158 Milan – Italy - www.mapei.it**
- 4) Systems of AVCP: **System 3**
- 5) Harmonized standards: **EN 15651-1:2012**

Notified bodies: **The notified laboratory Tecnia Research & Innovation, N. 1292, carried out the assessment of the performance on the basis of testing on samples taken by the manufacturer.**

The notified laboratory CSI S.p.A., N. 0497, carried out the assessment of the reaction to fire on the basis of testing on samples taken by the manufacturer.

- 6) Performances declared:

EN 15651-1 F-EXT-INT (Class 12,5P)

Conditioning: Method A

Substrate: Mortar M2 without primer


Essential characteristics	Performances
Reaction to fire	Class E
Release of dangerous substances	See SDS
Water tightness and air tightness:	
– Resistance to flow	≤ 3 mm
– Loss of volume	≤ 25 %
– Elongation after immersion in water at 23°C	≥ 100 %
Durability	Pass

The performance of the product identified above is in conformity with the set of declared performances.

This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by: **Paolo Murelli – Corporate Quality Management**

Milan, 09/02/2016




DoP in Pdf format are available in the Mapei website.

Revision 1 notes:	Unchanged product, DoP layout updated
-------------------	---------------------------------------

CE marking

 1292,0497	 Via Cafiero, 22 – 20158 Milano (Italy) www.mapei.it
14 CPR-IT1/0441 EN 15651-1 F-EXT-INT MAPEFLEX AC-P <i>Acrylic sealant for non-structural internal and external use in façade elements</i>	
Conditioning: Method A Substrate: Mortar M2 without primer	
Reaction to fire Release of dangerous substances Water tightness and air tightness: – Resistance to flow – Loss of volume – Elongation after immersion in water at 23°C Durability	Class E See SDS ≤ 3 mm ≤ 25 % ≥ 100 % Pass

CE reminder printed on the cartridge

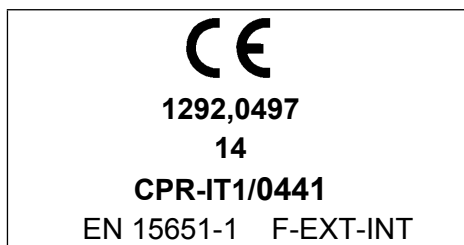

Note:

MAPEI supplies the current annex along with the DoP to make the consultancy of the CE marking easier for the international clients. The enclosed CE marking can be slightly different compared to the one printed on the relevant packaging or documentation because of:

- graphic adaptations due to lack of space on the packaging or printing methods used,
- different language (the same packaging can be shared by several countries),
- the product is already in stock when the updating of the CE marking is implemented,
- printing mistakes.